
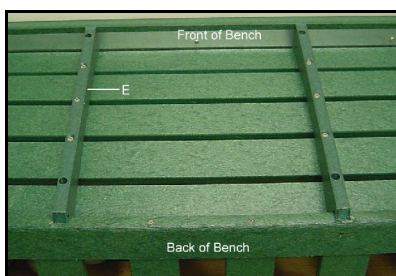
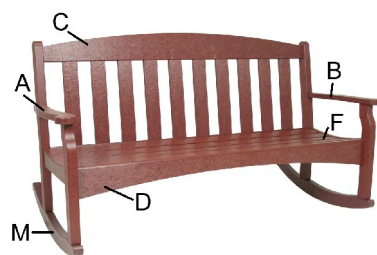
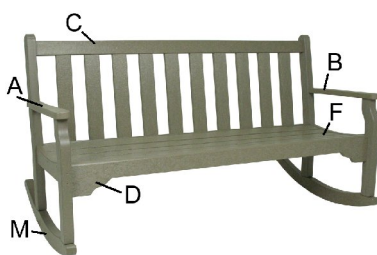


60" Rocking Bench Assembly Instructions

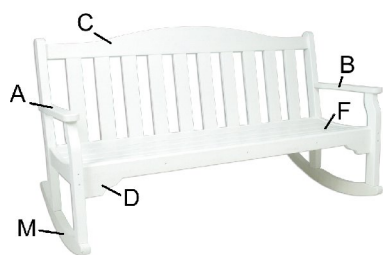

Tools:

Square Drive Tip (included) with a Power Screwdriver (not included). 1/2" Socket and Ratchet.

Parts Included:

- A** Left End Assembly (1)
- B** Right End Assembly (1)
- C** Back Assembly (1)
- D** Front Seat Rail (1)
- E** Under Seat Supports (3)
- F** Seat Slats (5)
- G** 3" Colored Screws (8)
- H** 2.5" Colored Screws (3)
- I** 2" Uncolored Screws (15)
- J** 1½" Colored Screws (9)
- K** 4" Hex Head Lags (4)
- L** Washers (4)
- M** Rocker Leg (2)

Instructions:

1. Lay Back Assembly (C) on flat surface with screws facing down. Locate pilot holes and attach Left Side Assembly (A) using 3" screws (G).
2. Locate Pilot holes and attach Right Side Assembly (B) using 3" screws.
3. Attach Front Seat Rail (D) with 3" screws. The metal support should be facing the back of the bench.

4. Locate pilot holes in Front Seat Rail. Align Under Seat Supports (E) with pilot holes and attach with 1½" Screws (J). Use one screw per Support.
5. Turn bench around and attach Under Seat Supports to Back Assembly with 2.5" Screws (H). Use one screw per Support.
6. Turn bench upright with bottom on floor. Put one end of Seat Slat (F) in joint and flex the slat in order to get other end of slat in joint. Repeat this for all Seat Slats.
7. Tip the bench, facing the back down and attach Seat Slats to Under Seat Supports using 2" Screws (I).
8. Tip bench back up, facing the seat down and attach outer and middle slats to sides using 1½" screws.
9. Lay Bench on side and attach Rocker Leg (M) to End Assembly using Lag Bolts (K) with Washer (L). Tighten using ½" Socket and ratchet. Repeat for other end.